



Project Name	
Project #	
Model #	
Type	

FPL-004-P2X CCT and Wattage Tunable LED Panel Light

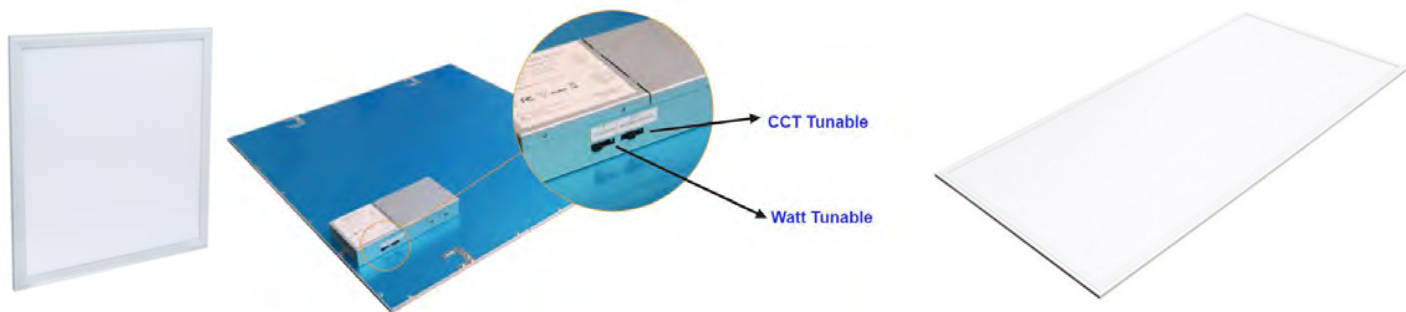

DIMENSIONS

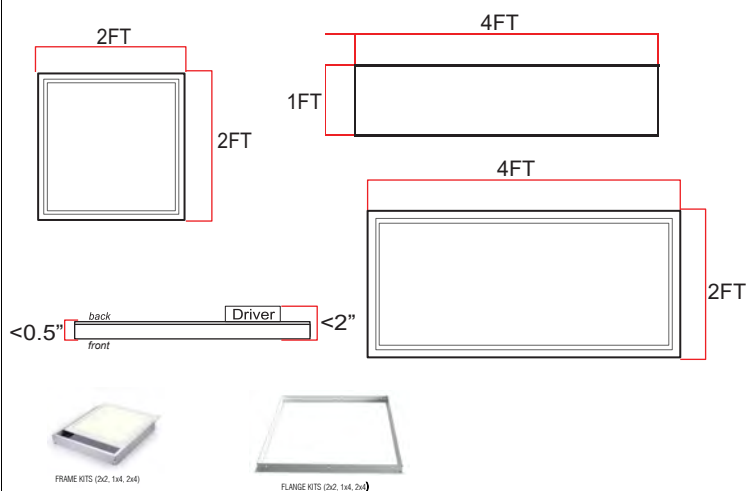

CERTIFICATIONS



FEATURES

- Watt & CCT Changeable LED Flat Panel
- Ultra-slim Aluminum Frame <0.5"
- External UL Listed Class-2 Constant Current Driver
- Multiple mounting options
- Suitable for damp locations
- Minimize labor and recycling costs
- Ease of installation and maintenance
- 0-10V dimming
- 5 Year Manufacturer's Warranty
- Emergency Battery option available

WARRANTY

- Only offer 3 year's or 5 year's warranty or any other warranty period specified in the contract for the product from the date of purchase:
- Invoice or shipment bill is required to claim the warranty.
- The warranty policy only requires manufacturer to repair the defective product or send substitute for replacement.
- Installation labor, electricity cost and other related cost will not be covered by the manufacturer warranty policy.
- Warranty doesn't cover the defect caused by inappropriate use, especially if directions of the instructions for use are not observed, normal abrasion as well as failures which affect the value or use of the product insignificantly.

ORDERING INFORMATION

EX:FPL-004-PL24-50W-MV-35K-WH-DC-SK-EM

Series	Wattage (Selectable)	Input Volt	CCT [Selectable]	Finish	Dimming	Framing	EM Function
1a. FPL-004-PL22	2a. 20W/30W/36W/40W	3a. MV	4a. 3000K/3500K/4000K/5000K	5a. WHT	6b. DC	7a. (Blank)	8a. (blank)
1b. FPL-004-PL14	2b. 25W/36W/40W/50W					7b. SK	8b. EM*
1b. FPL-004-PL24						7c. FK	

Notes:

If you do not see an option you would like please inquire directly and we will work to accommodate your needs.

1b. 2' x 2' option: 20W / 30W / 36W / 40W Selectable via Dip Switch
1c. 2' x 4' option: 25W/ 30W / 40W / 50W Selectable via Dip Switch

3a. 100-277V 50/60Hz input voltage
4a. 3000K / 3500K / 4000K / 5000K Selectable via Dip Switch
5a. White; Powder coat

6a. 0-10VDC Dimming (Standard)
7a. Leave Blank if not Required (Drop Ceiling)
7b. SK Surface Mount Kit

7c. FK Flange Kit
8a. Leave blank if no EM Function required
8b. 90 minute emergency battery *(FieldInstall)

All of the products and specifications can change without prior notice

Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes

1834 NW 21st STREET MIAMI, FL 33142 | PHONE – 786.420.3600 | FAX – 786. 20.

| SPECTRASOL-US.COM