

Project Name	
Project #	
Model #	
Type	

## FPL-222-BLXX Series

### FEATURES & SPECIFICATIONS


The Back Lit panel is a direct lighting product with high lumen efficiency. It makes full use of all light and is more cost effective compared with side lighting LED panel light. Adopt optical lens to offer a uniform light effect. With integrated iron plate, providing great thermal management.

#### Features

- > Uniform light effect with optic lens.
- > integrated iron plate design provides excellent thermal management.
- > Concise design offers high cost performance.
- > Built-out driver.
- > Color changeable, wattage switchable.
- > Installation: recessed, suspended and surface mounted.



#### Application Areas

Office & school lighting; office room, meeting room, classroom etc. Commercial lighting; shopping mall, super market, retailer shops etc. Other situations: hospital, laboratory, dust-free workshop, etc.

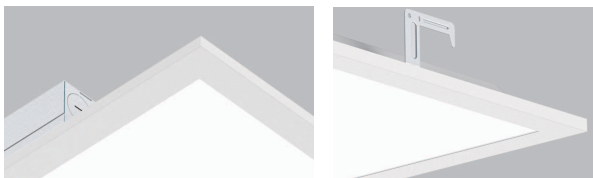

### Measurement

Model	Dimension(inches)				Product Weight (lb)
	A	B	C	D	N.W/PC
2X2	23.74	23.74	1.65	1.26	4.2
					4.2
1X4	11.93	47.75	1.65	1.26	4.6
					4.6
2X4	23.74	47.75	1.65	1.26	7.05
					7.05

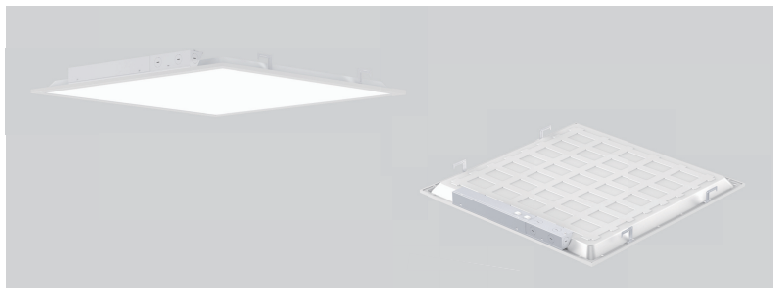

### ORDERING INFORMATION

EX:FPL-222-BL24-50W-MV-35K-WH-DC-SK-EM

Series	Wattage (Selectable)	Input Volt	CCT [Selectable]	Finish	Dimming	Framing	EM Function
1a. FPL-222-BL14	2a. 20W/30W/40W	3a. MV	4a. 3500K/4000K/5000K	5a. WHT	6b. DC	7a. (Blank)	8a. (blank)
1b. FPL-222-BL22	2b. 20W/30W/40W					7b. SK	8b. EM*
1c. FPL-222-BL24	2c. 30W/40W/50W					7c. FK	

#### Notes:

\*If you do not see an option you would like please inquire directly and we will work to accommodate your needs.\*

- 1a. 1' x 4' option: 20W / 30W / 40W Selectable via Dip Switch
- 1b. 2' x 2' option: 20W / 30W / 40W Selectable via Dip Switch
- 1c. 2' x 4' option: 30W / 40W / 50W Selectable via Dip Switch

- 3a. 100-277V 50/60Hz input voltage
- 4a. 3500K/4000K/5000K Selectable via Dip Switch
- 5a. White; Powder coat

- 6a. 0-10Vdc Dimming (Standard)
- 7a. Leave Blank if not Required (Drop Ceiling)
- 7b. SK Surface Mount Kit

- 7c. FK Flange Kit
- 8a. Leave blank if no EM Function required
- 8b. 90 minute emergency battery \*(Field Install)

\*All of the products and specifications can change without prior notice\*

\*Please note this specification sheet is considered to be business promotional material and not used for product listing identification purposes\*

1834 NW 21<sup>st</sup> STREET MIAMI, FL 33142 | PHONE – 786.420.3600 | FAX – 786.420.3602 | SPECTRASOL-US.COM